


PLAN 2

EXTENSION (1)

MAIN 2

MAIN 1

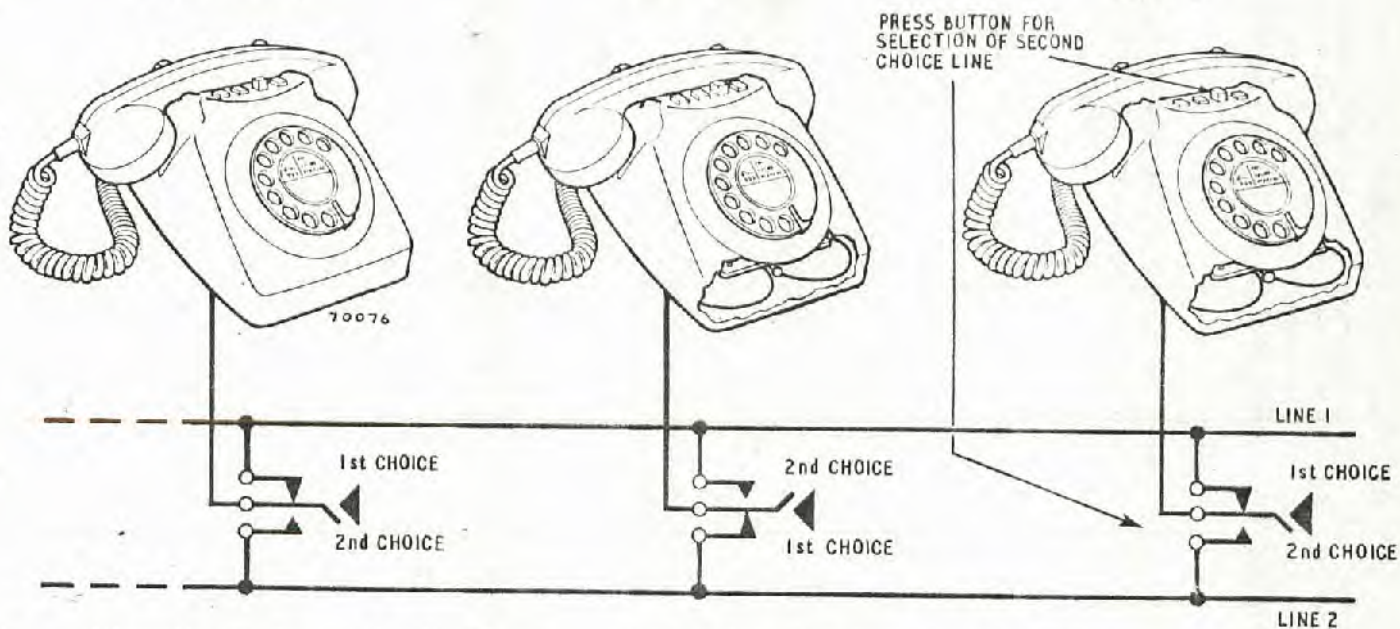

* Plan 2 consists of two lines, each terminated on separate telephones. A press button on each telephone gives access to the alternative line and this is restored when the handset is replaced. The lines may be exchange lines or PBX extensions.

Each of the two main stations, one for each line, has a bell; other stations (extensions) have no bell. An incoming call rings the appropriate bell and can be answered at any disengaged telephone. It follows that this plan is suitable only where all the telephones are in the same room and within sound of the bells.

* The dial label shows the numbers of both lines; the first number identifies the line connected to the telephone when the press button is in the normal position.

Each telephone can call the exchange direct on either line.

There is secrecy between lines but not between telephones switched to the same line.

Intercommunication between telephones is not provided, neither is it possible, using the same telephone, to hold a call on one line while making an enquiry on another.

When four or more telephones are provided, they may be divided into two groups, each group having a different first choice line.

All cabling between mains and extensions must be internal.

* When fitted on extensions of cordless PMBXs 2 + 6, 3 + 12, 4 + 18 and 5 + 25 Plan 2 must be terminated as a 2-wire extension using a conversion unit.

TM&D/TMk1.6.3

E N D