


DRG. 60909

S/D.O.

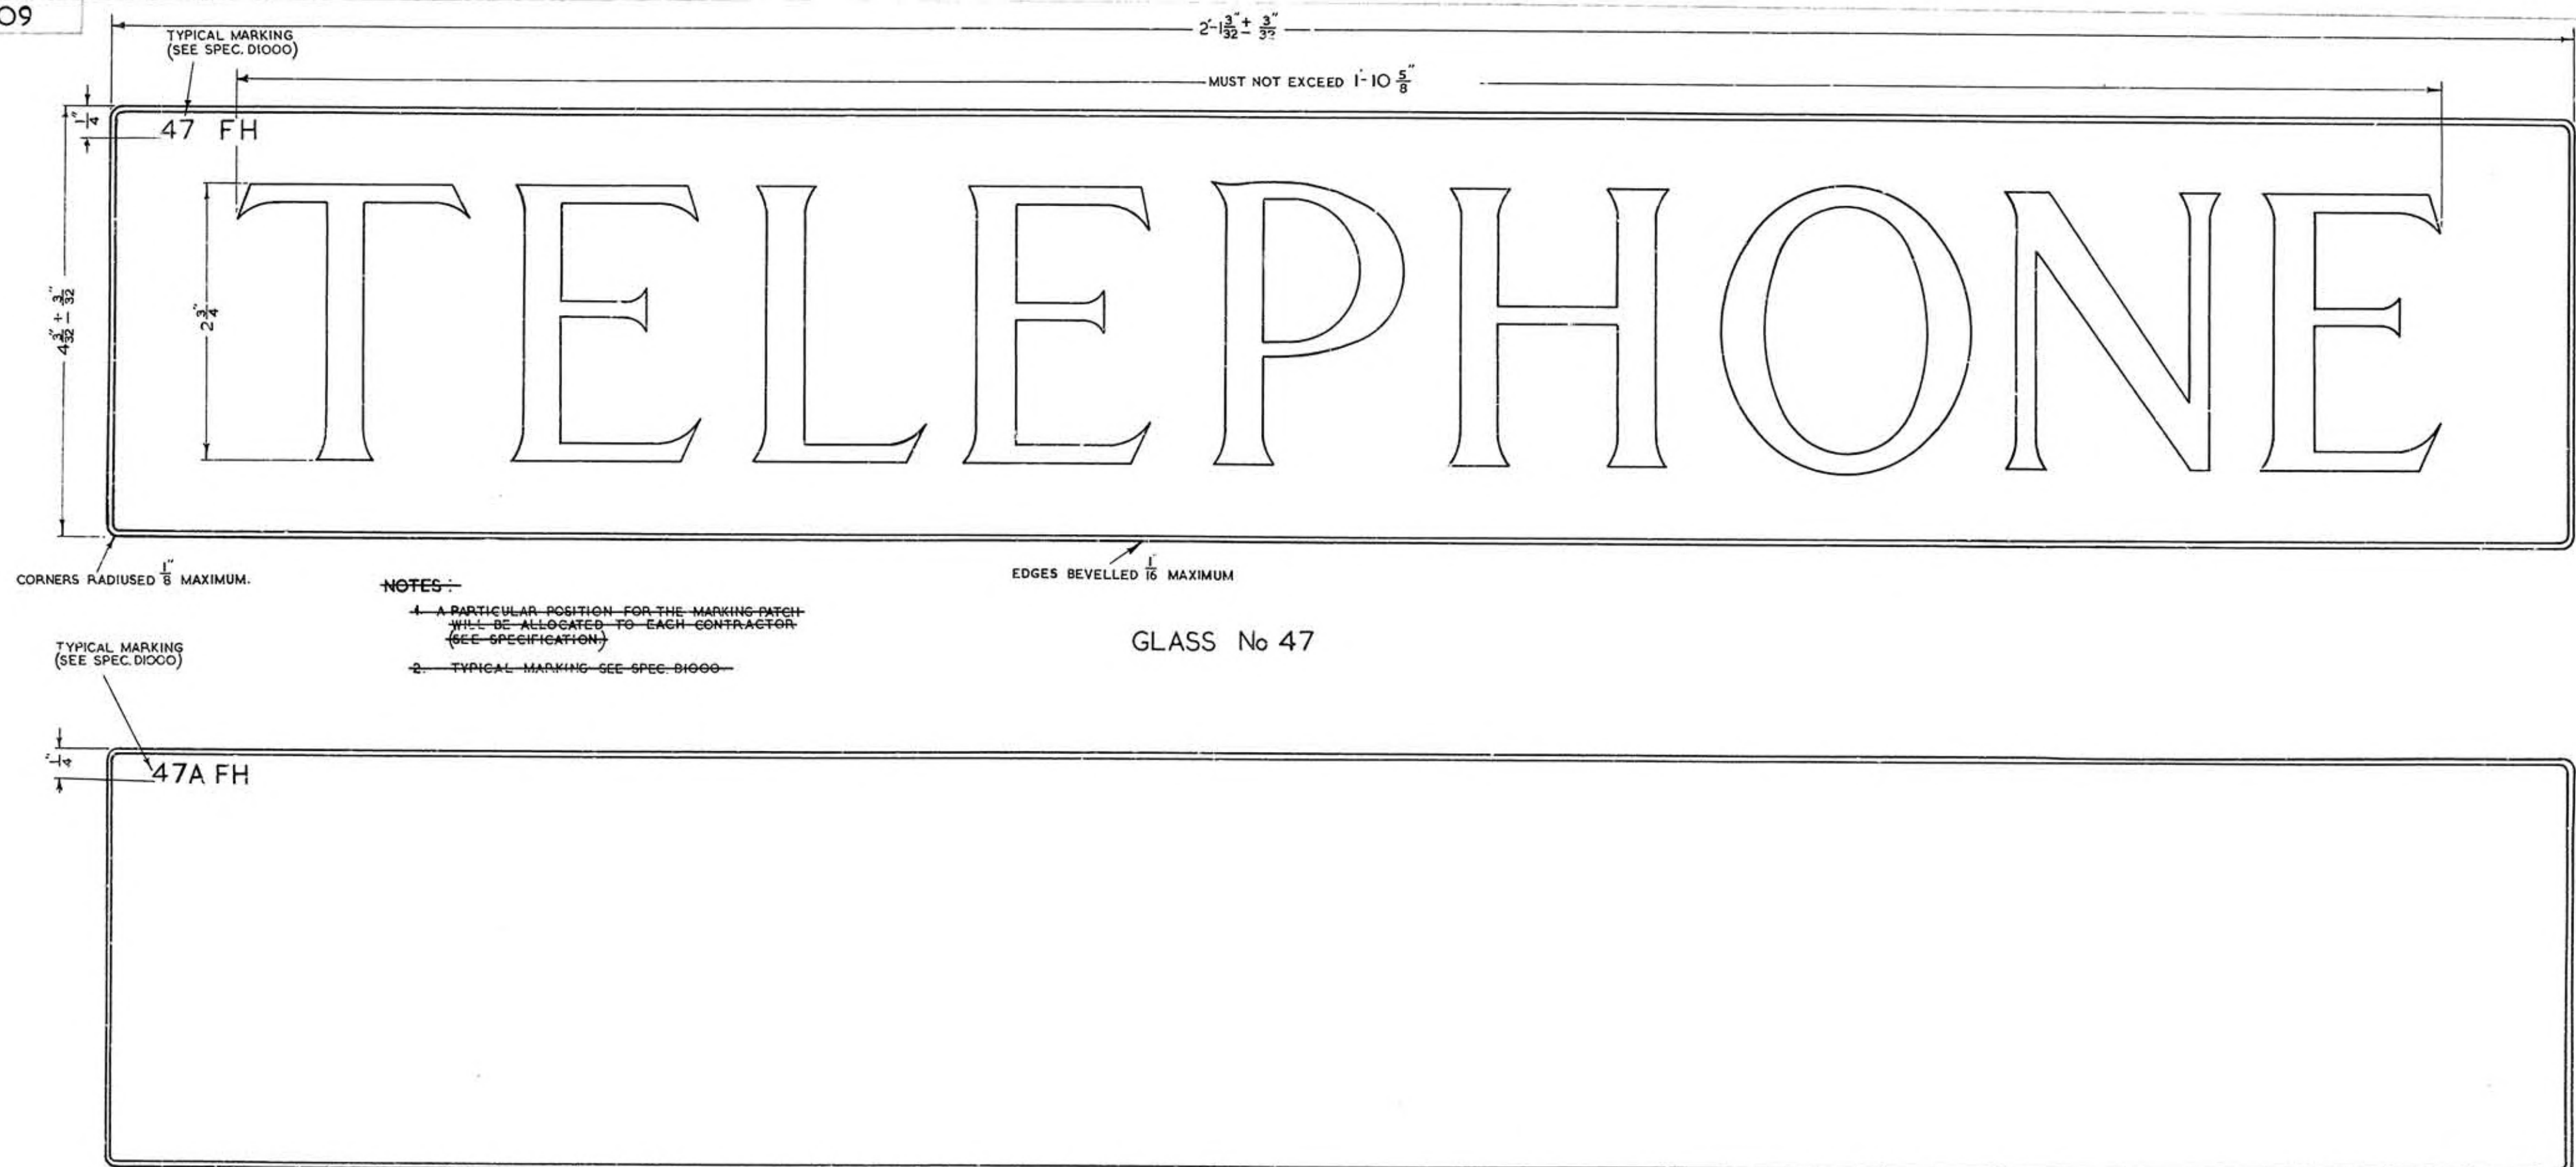

CORNERS RADIUS  $\frac{1}{8}$  MAXIMUM.

NOTES—  
 1. PARTICULAR POSITION FOR THE MARKING PATCH WILL BE ALLOCATED TO EACH CONTRACTOR (SEE SPECIFICATION)  
 2. TYPICAL MARKING—SEE SPEC. D1000

EDGES BEVELLED  $\frac{1}{16}$  MAXIMUM

GLASS No 47

TYPICAL MARKING (SEE SPEC. D1000)

47A FH

GLASS No. 47A  
 ALL PARTICULARS AS No. 47 BUT WITHOUT LETTERING AND WHITE BACKGROUND.

POST OFFICE ENGINEERING DEPT. E-IN CS OFFICE S BRANCH	
DISTRIBUTION RESTRICTED	
REFERENCES SPEC D1000 S 323	
ASSEMBLY Dwg	WIRING Dwg
FILE S1491/47	SPEC S323
SCALE 1" = 1" AND AS INDICATED	ANGLE PROJECTION
DECIMAL DIMENSIONS NOT TOLERANCED SUBJECT TO	
APP'D IN S. SECTION	DRN. L.J.W.
J.M. MADDOCK	TCD. L.J.W.
	CKD. W.J.J.
	DATE 26-8-55
AMENDMENT	
GLASS No. 47A ADDED	20/54
E.A.C. H.L.S. J.D.C.	7-54
REDRAWN, DIMENSIONS WERE 2'-1 1/8" LONG AND 4 1/8" WIDE	G
WIDE <i>2'-1 1/8" x 4 1/8"</i>	H
GLASS No. 47, 47A SUBSTITUTED FOR PATCH MARKING.	
<i>2009. 26. H.L. 17. 10. 54</i>	
CENTRE BAR OF FIRST 'E' REDUCED IN WIDTH.	J
<i>43</i>	31-10-62
FOR SUPPRESSED	
GLASSES Nos. 47 & 47A	
DRG. 60909	