


DRG. 7123

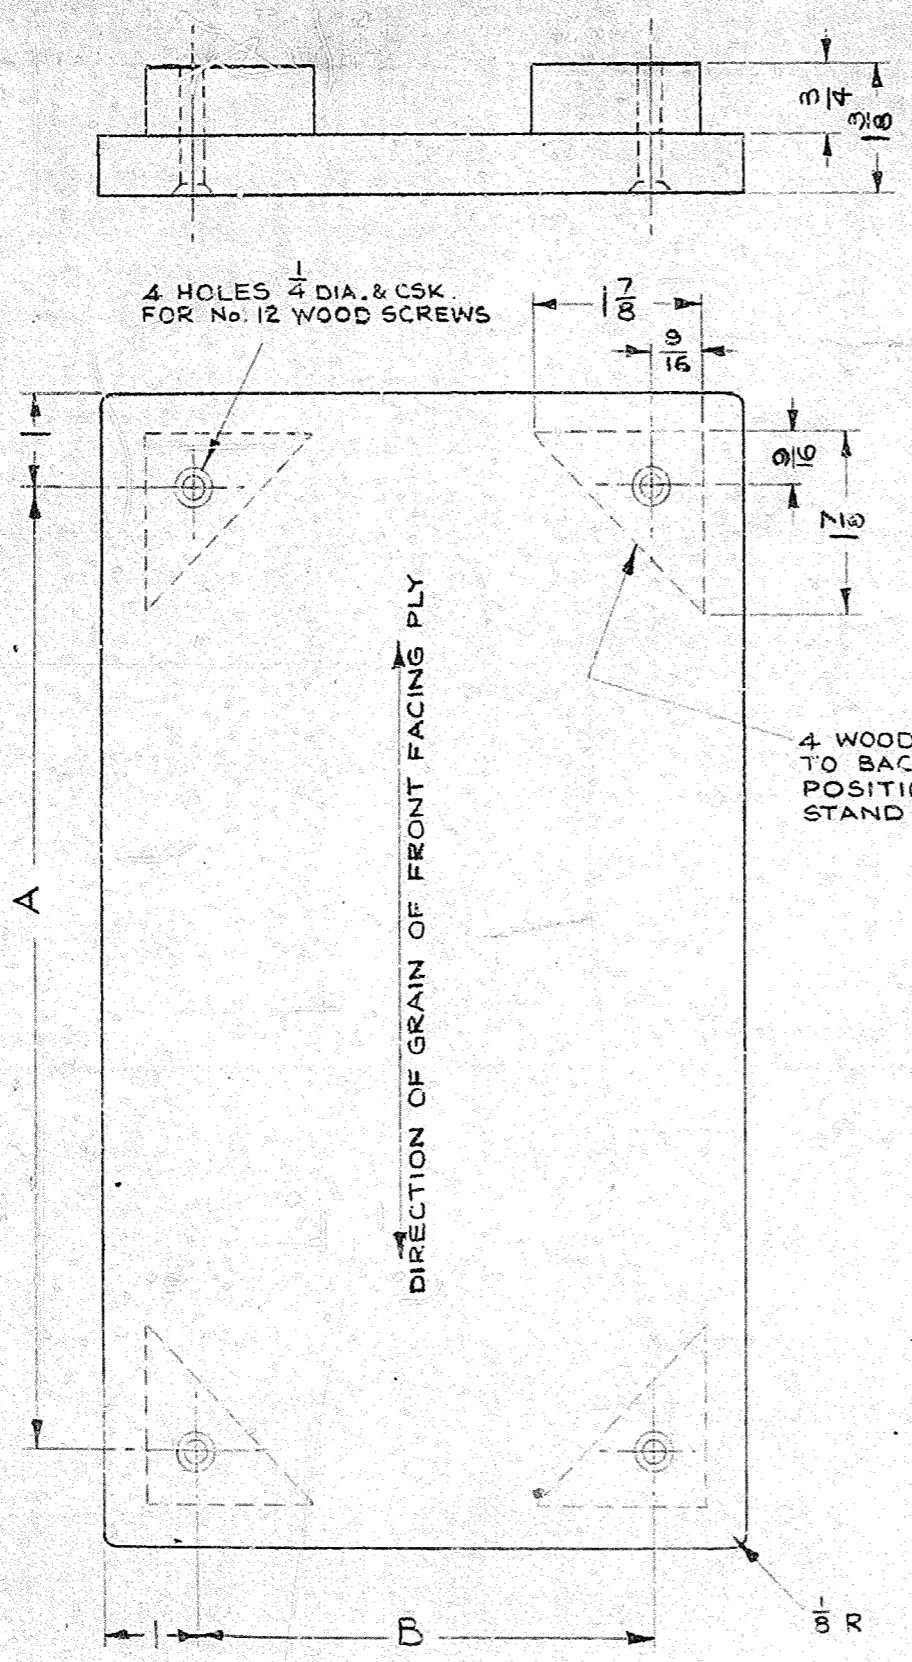

WALLBOARD (INS.)	FIXING CENTRES (INS.)	
	A	B
12 X 9	10	7
18 X 14	16	12
DELETED		
21 X 15	19	13
24 X 16	22	14
DELETED		
33 X 18	31	16
34 X 27	32	25
36 X 24	34	22

**SPECIFICATION:-** PLYWOOD TO BE SPEC. B.S. 1455 GRADE 2-3, BONDING MR, 8<sup>00</sup>"

**FINISH:-**  
 FOR WALLBOARDS INS:- THE WHOLE TO BE SANDED, STAINED WALNUT AND SEALED. THE FRONT AND EDGES TO BE TREATED WITH TWO COATS OF COLD CURE WOOD LACQUER TO GIVE A SMOOTH SEMI-GLOSS FINISH.  
 FOR WALLBOARDS GREY INS:- THE WHOLE TO BE SANDED AND SEALED. THE FRONT AND EDGES (INCLUDING EDGES OF FEET) TO BE TREATED WITH TWO COATS OF COLD CURE WOOD LACQUER TO GIVE A SMOOTH SEMI-GLOSS FINISH, COLOUR LIGHT FRENCH GREY (SPEC M302)

DIMENSIONS IN INCHES

POST OFFICE ENGINEERING DEPT  
S BRANCH

DISTRIBUTION RESTRICTED

REFERENCES  
 SPEC D1000  
 SPEC. B.S. 1455  
 SPEC. M302

ASSEMBLY DRG WIRING DGM

FILE 51304/35 SPEC

SCALE - 1/2 AND AS INDICATED THIRD ANGLE PROJECTION

DECIMAL DIMENSIONS NOT TOLERANCED SUBJECT TO FRACTIONS ± 1/64

APPD. IN S1/3 SECTION DRN F.D.M  
 F.M.C.C. TCD C.A.C.  
 ORIGINAL SIGNED CKD ✓  
 BY JOHN R. GALL. DATE JULY 1972

AMENDMENT	SUFFIX
SEE SUPERSEDED ISSUE FOR PREVIOUS AMENDMENTS	
REDRAWN. FINISH WAS INCLUDED IN SPECIFICATION. M.G.L. <i>[Signature]</i> Ref 29.3.66	T
WALLBOARD 24 x 16 WAS 24 x 15. C.B.N. <i>[Signature]</i> Ref 28.3.67	U

DO NOT SCALE  
(A MICROFILM PROCESS PRINT)

FOR SUPERSED

WALLBOARDS INS.  
AND  
WALLBOARDS GREY  
INS.

DRG 7123