

# STATION USER GUIDE

The KX-T123220, KX-T123230 and KX-T123250 can be connected to the KX-T123211D.


Additional features will be provided with KX-T123220, KX-T123230 and KX-T123250 by this connection.

Use this Station User Guide with Operating Instructions of the KX-T123220, KX-T123230 and KX-T123250.


In this guide, the Model No. KX-T123211D is abbreviated to KX-T123211.




KX-T123220



KX-T123211D

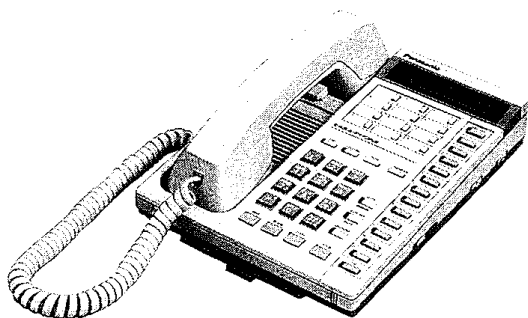

KX-T123230

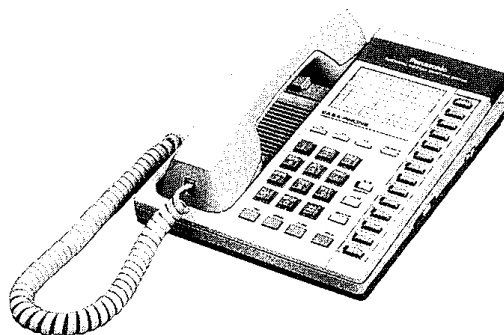

KX-T123250

## When a Line is Busy


### Executive Override (Barge-In) – into CO

Allows an extension or CO line user to intrude into a CO line in use. This feature is required to be set beforehand in the KX-T123211.

For programming, see page 3-74 in the INSTALLATION MANUAL.



Lift handset or press SP-PHONE



Press CO in which you want to intrude.

A 3-party conference is now established.

- If the other party is setting "Data Line Security", you can not intrude into the other party that is in conversation.

## Paging

### Paging All Extensions and External


Allows paging to all extensions and external paging equipment.

The page can be heard from the proprietary telephones (KX-T123230, KX-T123220, KX-T123250 or KX-T123235 etc.) and external paging equipment.


#### To access



Lift handset or press SP-PHONE



Dial "33 \*"



Confirmation tone of 1 beep will be heard



Page



Wait for an answer and talk

- Paging will be heard from the built-in speaker and external paging equipment (1 and/or 2).



1

and



2

- You may dial 32 \* instead of 33 \*.

# Use of Other Features


## Electronic Station Lock

Locking an extension prohibits another user from dialing on an outside line until unlocked.


### ■ To lock




Lift handset or press SP-PHONE




Dial "77"



Dial lock code (000 through 999)



Dial same lock code again



Dial "#"




Hang up or press SP-PHONE


### ■ To unlock




Lift handset or press SP-PHONE



Dial "77"



Dial lock code



Dial "#"



Hang up or press SP-PHONE

- Lock code must be 3 numeric digits, excluding the " # " and " \* " buttons.
- If you forget the Lock code, see the "Cancellation of Electronic Station Lock" on page 4.

## Station Status Check


You can confirm your station status on the LCD.

- Be sure the handset is in the cradle and the SP-PHONE button is off.


### ■ To confirm

Press the following button(s) which you want to confirm.


#### ■ Proprietary Telephone



Press REDIAL



Press SAVE




Press PROGRAMMABLE FEATURE



Press FWD/DND




Press MESSAGE




Press CO

#### ■ DSS Console



Press DSS



Press PROGRAMMABLE FEATURE

- When the display of the contents stored exceeds 17 characters, the mark "&" will be displayed at the right end of the LCD.

## Use of Other Features (cont.)


### Timed Reminder

If a time is set, an Alarm tone will sound at the preset time.


#### ■ Setting



Lift handset  
or press  
SP-PHONE



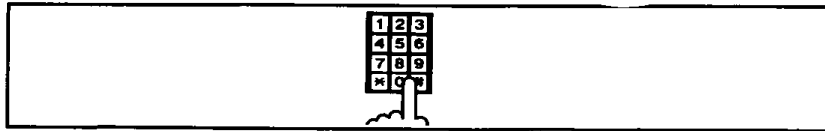

Dial "76"




Enter  
hour  
(01 through 12)

Enter  
minutes  
(00 through 59)

Dial  
"0" or "1"   
["0" : for AM]  
["1" : for PM]

Dial  
"1" or "2"   
["1" : only one day]  
["2" : every day]



Dial "#"




Hang up or  
press  
SP-PHONE

#### ■ To cancel



Lift handset  
or press  
SP-PHONE

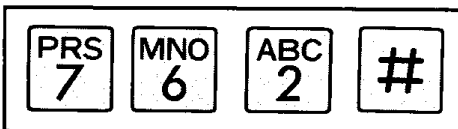


Dial "762#"

- After cancelling, hang up or press SP-PHONE.

#### ■ To confirm the setting time



Lift handset  
or press  
SP-PHONE

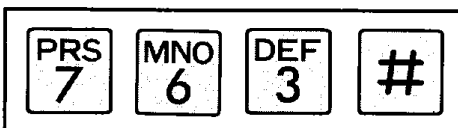

Dial "763#"

- After confirming, hang up or press SP-PHONE.
- Confirmation can be done only with the KX-T123230 equipped with LCD.


# Station Programming

## Cancellation of Electronic Station Lock (Extension of jack number 01 only)


You can cancel the Electronic Station Lock on all extensions.

This feature only is done through extension connected to jack number 01.

- Set the MEMORY switch of the KX-T123230 to "PROGRAM".



Dial "8"



Press MEMORY

- After canceling the Electronic Station Lock, return the MEMORY switch to the "SET" position.

## Outgoing Message (Extension of jack number 01 only)

Enables recording of a message that answers calls on the CO line set to "DISA" mode. The record time is max. 31 seconds. One message can be recorded.

- Set the MEMORY switch of the KX-T123230 to "PROGRAM".


### ■ To record



Dial "9"




Lift handset



Dial "2"



Give message




Press MEMORY

- Message which is recorded is played back automatically.

### ■ To play back only



Dial "9"



Dial "1"



Will hear message

- After recording or confirming, return the MEMORY switch to the "SET" position.
- Optional Outgoing Message Card and Direct Inward System Access Cards are necessary.
- If a power failure takes place for about 10 days, OGM will vanish. Then, "Record OGM" will be displayed and blink on the LCD of the extension connected to jack no.1. Please record OGM again.



-PANUG-021