


DRG. 90148

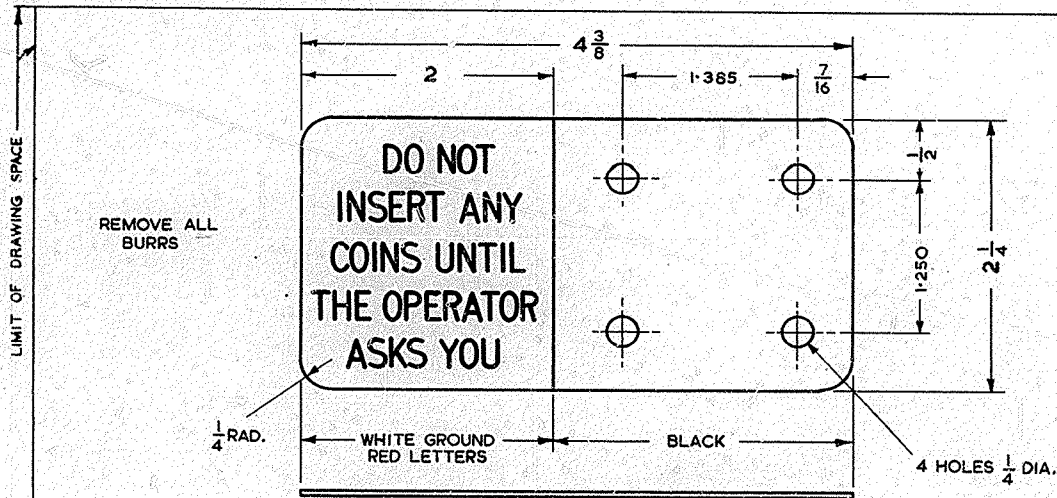

MATERIAL :- M.S. 18 S.W.G (-048)

FINISH :- VITREOUS ENAMELLED. TOP SURFACE SMOOTH, NOT LESS THAN 3 FUSINGS. FINAL THICKNESS TO BE NOT LESS THAN $\frac{1}{16}$

NOTE :- 4 SCREWS 4 B.A. X $\frac{7}{32}$ CSK. HD. M.S. NI. P. MT. TO BE SUPPLIED WRAPPED & TIED TO LABEL.

DIMENSIONS IN INCHES

POST OFFICE ENGINEERING DEPT
S BRANCH

DISTRIBUTION
RESTRICTED

REFERENCES

	SPEC. D 1000
ASSEMBLY DRG.	WIRING DGM.
FILE 6602/36	SPEC --
SCALE :- $\frac{1}{1}$ AND AS INDICATED	THIRD ANGLE PROJECTION
DECIMAL DIMENSIONS NOT TOLERANCED SUBJECT TO $\pm .010$	
APP'D. IN SI SECTION H.E.S S. L. HELMAN	DRN. A.E.W TCD. G.A.C DATE 21.7.52

AMENDMENT SUFFIX

REDRAWN. DIM. $4\frac{3}{8}$ WAS $5\frac{3}{4}$ DIM. 2 WAS $3\frac{1}{2}$. <i>MEJ sal</i>	<i>GI-3.10.58</i>	A
--------------------------------------------------------------------------------------------------	-------------------	---

FOR SUPERSED

BOX, C.C. PART
LABEL No. 306

DRG. 90148