


THE DOTTED CIRCLES SHOW RELATIVE POSITION OF HOLES IN PLATE, FINGER (PARTS 1 & 2/DPL/466) & ARE GIVEN AS A GUIDE ONLY. CIRCLES APPROX. .468" DIA.

10 - CENTRES SPACED 14 TO THE CIRCLE  
(THESE CENTRES TO COINCIDE WITH THE LOCATION CENTRES DENOTED BY THE SYMBOL + SHOWN ON DRG. SD 57)

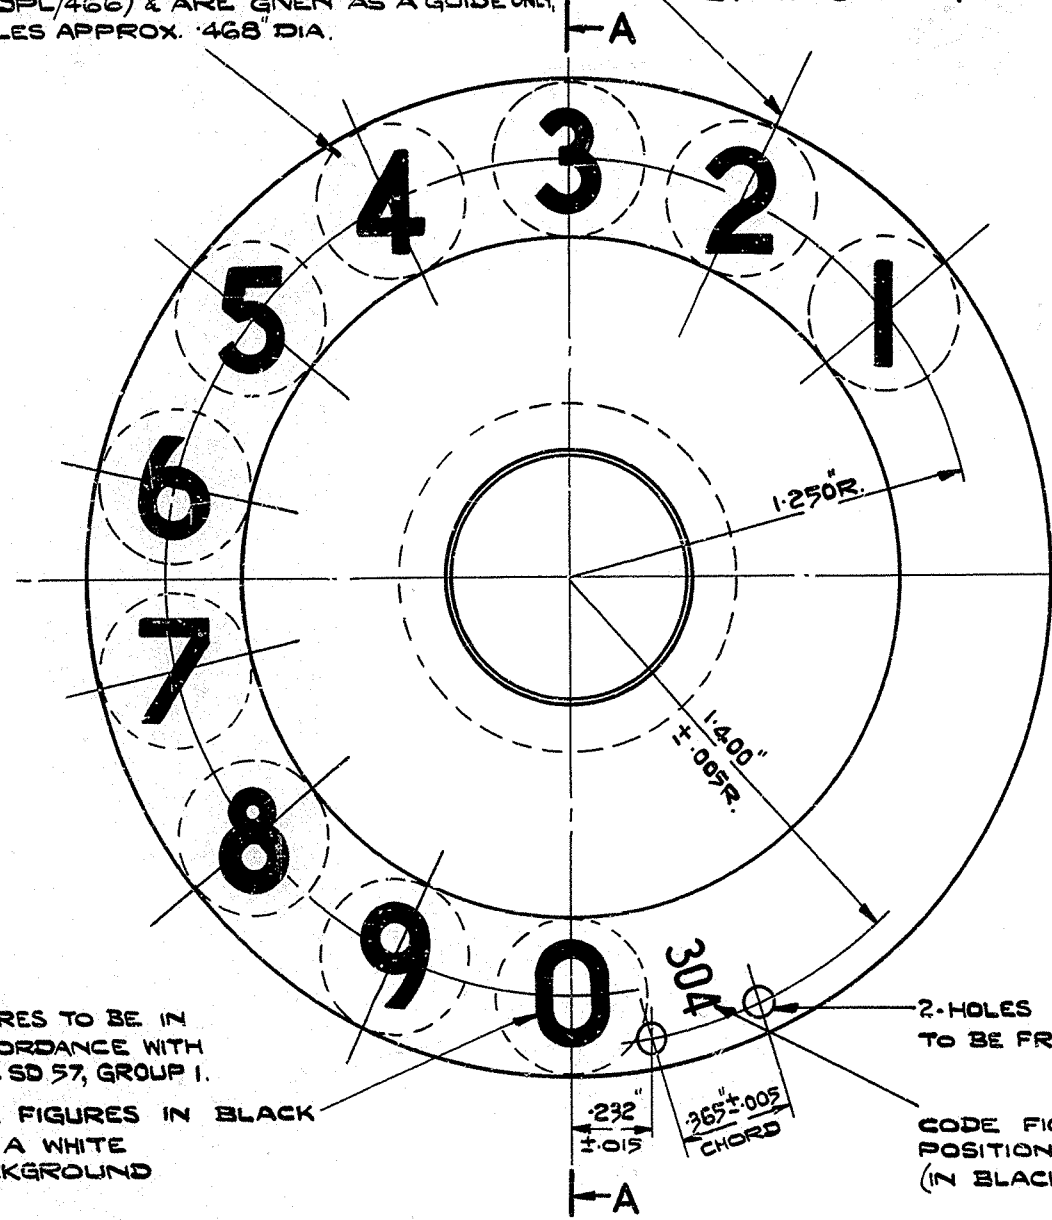

FIGURES TO BE IN ACCORDANCE WITH DRG. SD 57, GROUP I.


ALL FIGURES IN BLACK ON A WHITE BACKGROUND

DUPLICATE SAMPLE OF LABEL TO BE SUBMITTED TO THE ENGINEER - IN - CHIEF FOR APPROVAL BEFORE PROCEEDING WITH BULK MANUFACTURE

A PATTERN OF THIS LABEL MAY BE OBTAINED FOR GUIDANCE UPON APPLICATION

2 - HOLES .104" ± .005 DIA. TO BE FREE FROM ENAMEL

CODE FIGURES, 1/8" HIGH POSITION APPROX. AS SHOWN (IN BLACK)

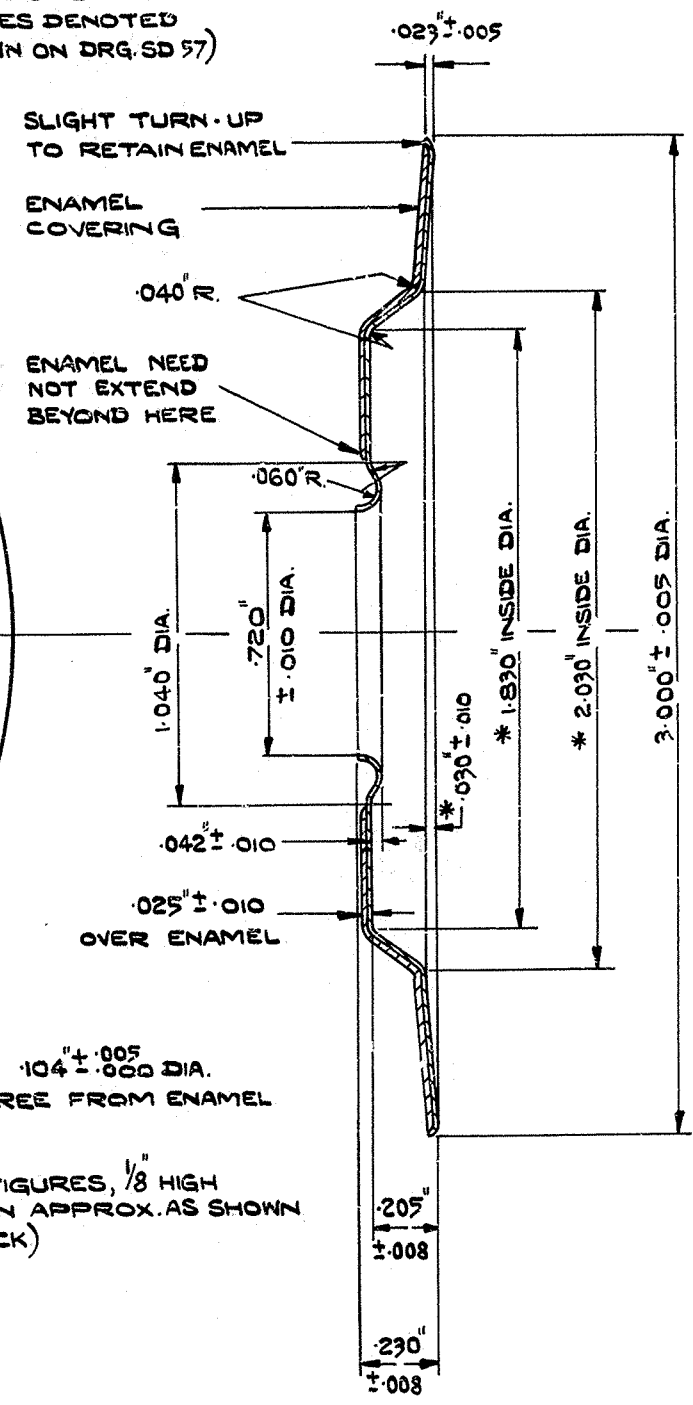

SECTION A-A

MATERIAL :- COPPER .008" ± .001  
FINISH :- ENAMELLED WHITE OVERALL  
FIRST USE :- DIAL AUTO., No 12 FA (DRG. 90156)

DISTRIBUTION		
P.O.	GENERAL	
REFERENCES		
DRG. SD 57	SPEC. D 1000	
	SPEC. S 409	
ASSEMBLY DRG. 90158	WIRING DGM.	
FILES 336/2	B.T.T.D.C.	SPEC. S 409
SCALE :- 2/1	3RD ANGLE PROJECTION	
DECIMAL DIMENSIONS NOT TOLERANCED SUBJECT TO ± .020"		
APP'D. IN S. 1/1 SECTION H.B.S.	DRN. T.C.D.	G.E.C. G.E.C.
<i>S. H. H.</i>	CKD. CONTRS. & DATE 15-3-52	

AMENDMENT	SUFFIX
SUPERSESION NOTE ADDED <i>H.B.S.</i> 20.7.62	A

FOR SUPERSEDING ITEM FOR NEW WORK SEE DRG. 90243 (LABEL No. 314)

LABEL  
No. 304

C  
P.49708