


THE DOTTED CIRCLES SHOW RELATIVE POSITIONS OF HOLES IN PLATE, FINGER (PARTS 1&2/DPL/466) & ARE GIVEN AS A GUIDE ONLY. CIRCLES APPROX. .468" DIA.


10-CENTRES SPACED 14 TO THE CIRCLE (THESE CENTRES TO COINCIDE WITH THE LOCATION CENTRES DENOTED BY THE SYMBOL + SHOWN ON DRG. SD 57)

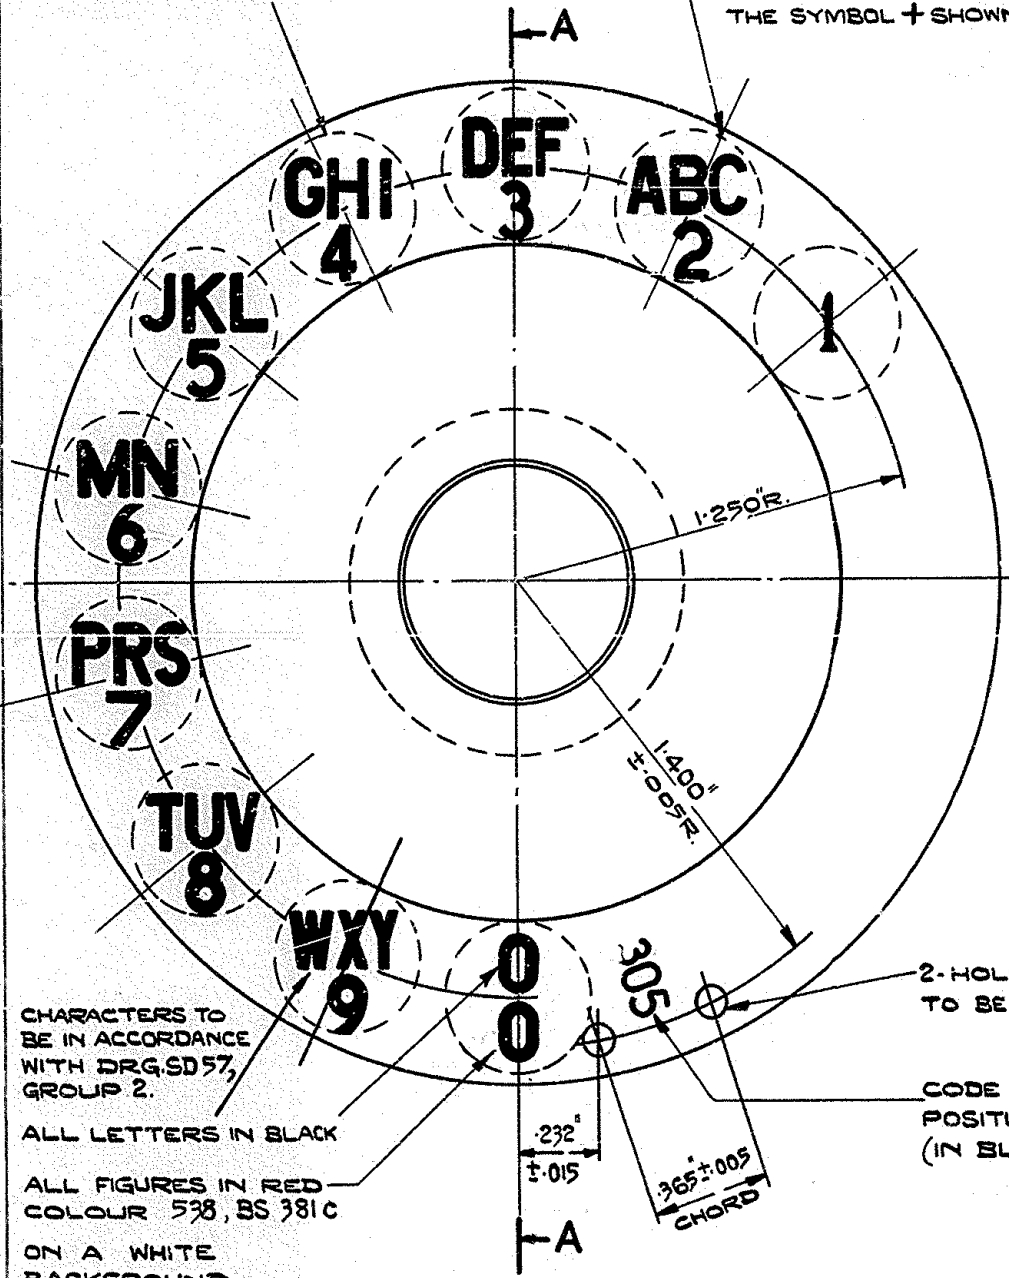

CHARACTERS TO BE IN ACCORDANCE WITH DRG. SD 57, GROUP 2.
 ALL LETTERS IN BLACK
 ALL FIGURES IN RED COLOUR 538, BS 381C
 ON A WHITE BACKGROUND

A PATTERN OF THIS LABEL MAY BE OBTAINED FOR GUIDANCE UPON APPLICATION. DUPLICATE SAMPLE OF LABEL TO BE SUBMITTED TO THE ENGINEER -IN- CHIEF FOR APPROVAL BEFORE PROCEEDING WITH BULK MANUFACTURE

C
P.50219

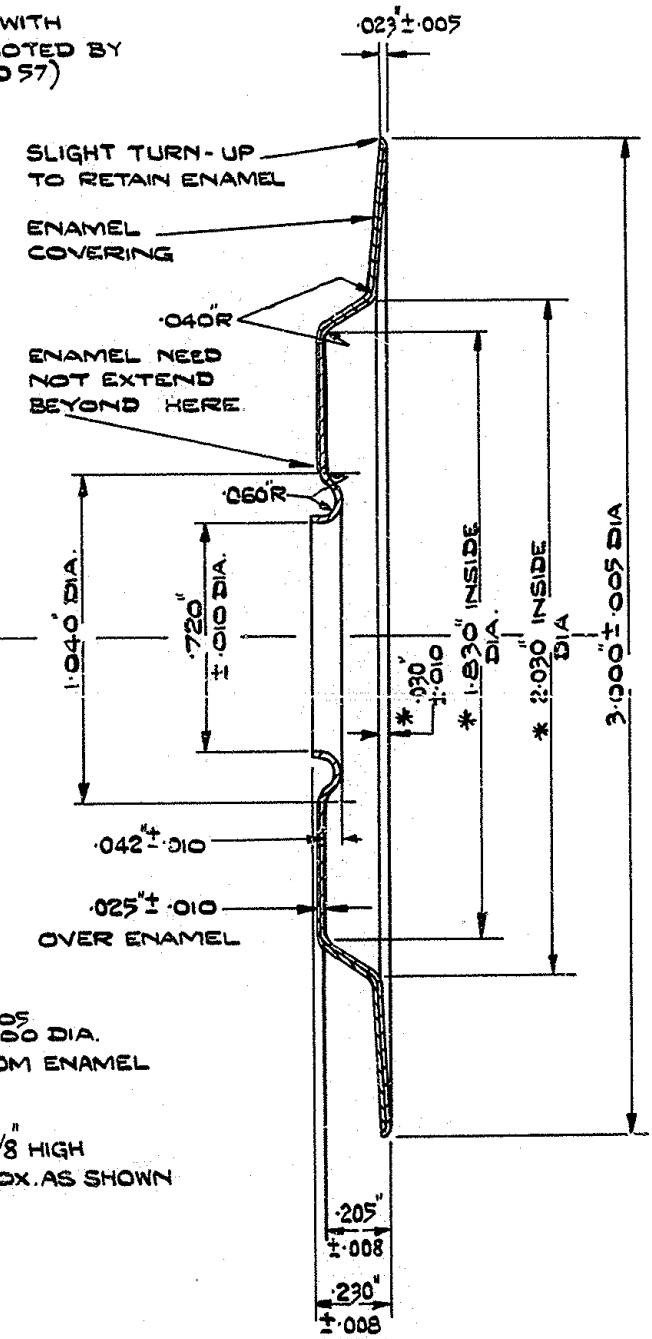

SECTION A-A

MATERIAL :- COPPER .008 +/- .001
 FINISH :- ENAMELLED WHITE OVERALL
 FIRST USE :- DIAL AUTO., NO 12 LA (DRG. 90158)

DISTRIBUTION		
P.O. GENERAL		
REFERENCES		
DRG. SD 57		SPEC. D1002
		SPEC. S409
		SPEC. BS.381c.
ASSEMBLY DRG. 90158		WIRING DGM.
FILE S336/2	BTT.DC	SPEC. S. 409
SCALE :- 2/1		3RD ANGLE PROJECTION
DECIMAL DIMENSIONS NOT TOLERANCED SUBJECT TO +/- .020"		
APP'D. IN S.1/1 SECTION HVS.	DRN. G.E.C.	TCD. G.E.C.
		CKD. CONTRS. &
		DATE 15-3-52

AMENDMENT	SUFFIX

FOR SUPERSED

LABEL
No. 305

* TO INTERSECTION OF LINES