





User guide

Duet 200 plus




EXCHANGE SWITCH




MODE SWITCH

Set this to T



Now make a call to check it works. If you cannot get through set it to P



If you get through this time is means you are on an old exchange. Your **DUET 200 PLUS** will work perfectly.

QUICK DIAL


Allows you to access memories by pressing the QUICK DIAL key and then pressing the numerical key on which your required number was saved.

LAST NUMBER REDIAL BUTTON

If the last number you dialled was engaged or there was no answer, you can redial it by pressing this button.

RINGER SWITCH

This enables you to adjust the volume of the ringer. Either High, low or off.



MEMORY KEYS

Allows you to store up to 16 digits.

DISPLAY

SAVE

Used to dial last number stored in the Save memory store. See Using Save.

SECURITY

Pressing this prevents the caller from hearing what you are saying. You will still be able to hear the caller.

TIMER

After dialling the telephone number, press Timer, if you wish to time the call. The display will show 00-00 and start timing the call. Replacing the handset, stops the timer. If after replacing the handset, you wish to see the duration of the last timed call, then pick up the handset and press the Timer key.

RECALL

This enables you to access Network Services - For more information call BT free on 0800 800 150. The Star * and # Hash buttons will also be used for Network Services.

TO STORE IN ONE-KEY DIALLING

Press STORE key. Press M1 or M2
Key in the telephone number you wish to store.
Check the number on the display
Press store again. The number is now stored.

TO STORE IN TWO-KEY DIALING

Press STORE key. Press QUICKDIAL. Press one of the key pad buttons 1 - 0
(Depending on where you wish to store it)
Key in the telephone number you wish to store
Check the telephone number on the display
Press STORE key again. The number is now stored.

USING SAVE

SAVE allows you to either store a number you have just dialled into the Save memory store or Save a number given by a caller whilst on a call.


1. To save a number you have dialled, just Press the Save button after dialling your number. This automatically transfers that number to the save memory store.
2. Whilst on call you can store a telephone number given by the caller by Pressing STORE then SAVE followed by the number then STORE again.
3. To dial a number stored in the Save memory, lift the handset and press the Save button.


IF THE PHONE IS UNPLUGGED

If the phone is unplugged from its socket for more than 5 minutes, the numbers stored in the memory may be lost.

RAISED DOT

This raised dot on the 5 button can help you to find the other number if you are visually handicapped or dialing in the dark.

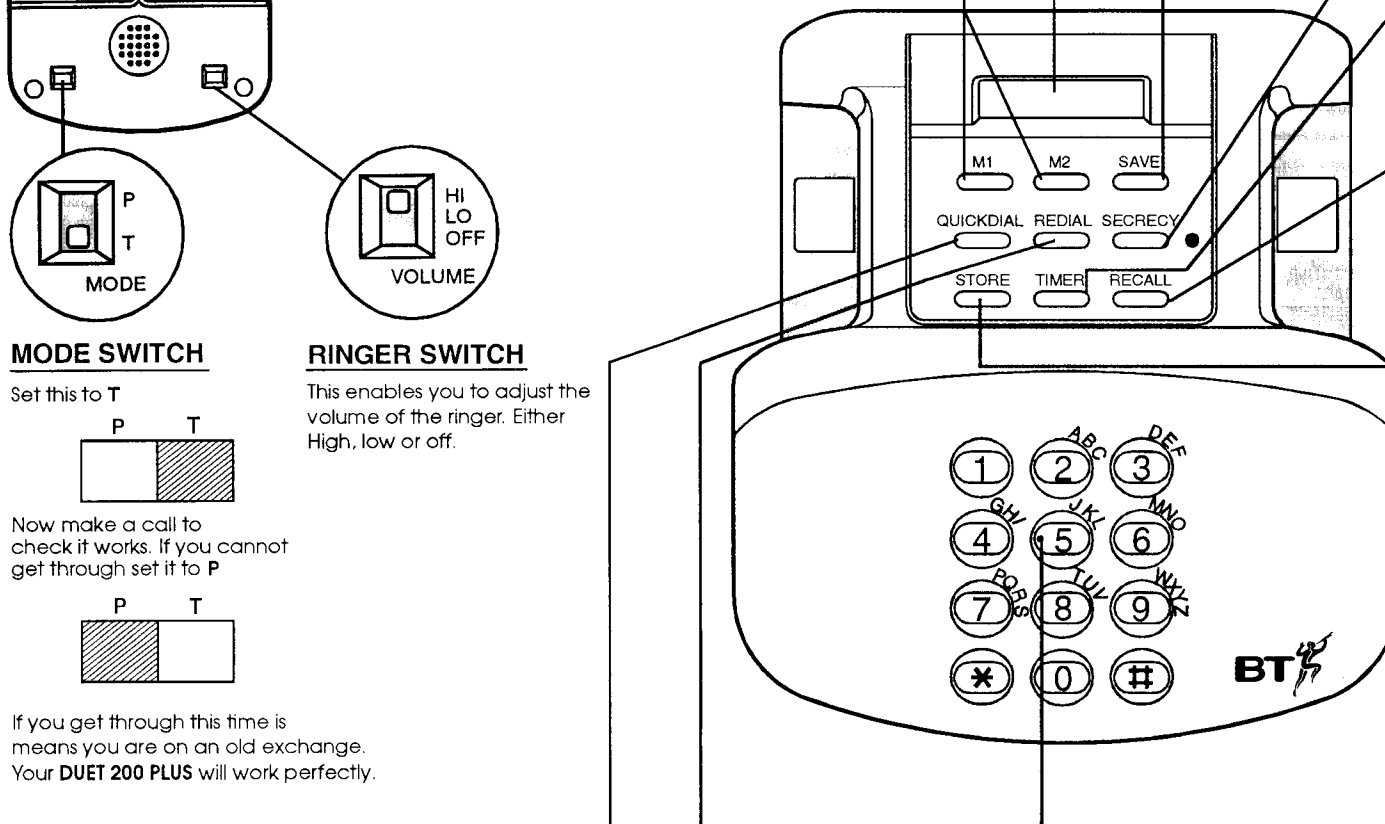

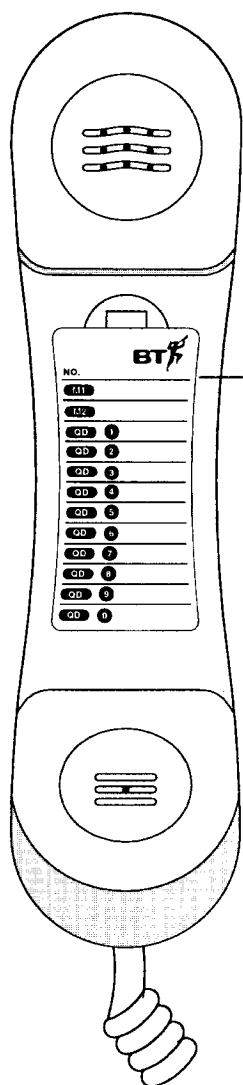

Memory Label

Write the name of the person, whose number is stored, on this label.
(Use a pencil, so it can be changed if necessary)

Help !

If your Duet 200 PLUS doesn't seem to be working properly you can run through these simple checks

Is the handset on properly? If so, check other extensions around the house.

Is it plugged in properly?

Is the exchange switch on the base in the correct position?

Is the volume switch set to OFF by mistake?

Ringer

To help you, every phone has what is called a Ringer Equivalence Number (REN), which is shown on a label beneath the phone. In most cases a standard line should provide enough current for two or more phones whose RENs add up to no more than 4.

Your DUET 200 PLUS has a REN of 1. Any other phone provided by BT may be assumed to have a REN of 1 unless otherwise on the base.

Technical Information

Duet 200 PLUS has been approved for use of the following facilities:

Simple telephone facility

Loop Disconnect dialling/MF tone dialling

Time break recall

Secrecy

Storage of telephone numbers for retrieval by a predetermined code

Automatic storage of last number dialled

Quick dial

Timer

Save

Liquid crystal display

Operation in the absence of secondary proceed indication

Any other usage will invalidate the approval of the apparatus if, as a result, it then ceases to conform to the standards against which approval was granted.

You may connect it to:

Direct exchange lines providing Loop Disconnect (LD) or Multi-Frequency (MF) signalling and Earth or time Break Recall facilities.

Extensions with new plug and socket arrangements provided with these direct exchange lines.

Compatible switchboards

You may not connect it to:

Shared service (party) lines

1 + 1 carrier systems

Important! Compatible switchboards

Your Duet 200 plus is only approved for use with a compatible switchboard including those which do not provide secondary proceed indication. If you would like a list of suitable switchboards, contact BT on 0800 800 152. If you do have a compatible switchboard it cannot be guaranteed that the telephone will operate correctly under all possible conditions of connection. If you have any difficulties, contact BT on 0800 800 152.

Calling The Emergency Services

The Emergency Services can be contacted using this telephone by dialling 999.

APPROVED for connection to telecommunication systems specified in the instructions for use subject to the conditions set out in them.

S/2981/3/M/502324

*Offices in
Europe, North America
and the Far East.*

The telecommunications services described in this publication are subject to availability and may be modified from time to time. Services and equipment are provided subject to British Telecommunications plc's respective standard conditions of contract.

© British Telecommunication plc 1994
Registered office:

81 Newgate Street, London EC1A 7AJ.
Registered England NO.: 1800000.

Printed in Malaysia. PHME 14929.

Issue 1 (07/94). MO1

