

CALL OFFICE CIRCUIT.

N.1171.


BOX COIN COLLECTING No. 14A COMPLETE, WITH TELEPHONE No 182 C.B. *Superseded by N.2406 for new work 18.12.30.*

Wiring Diagram for C.B. System.

Box Coin Collecting No. 14A Complete. (Note 4.)

Bell Set No 24.

Relays & Coils No 29A0.

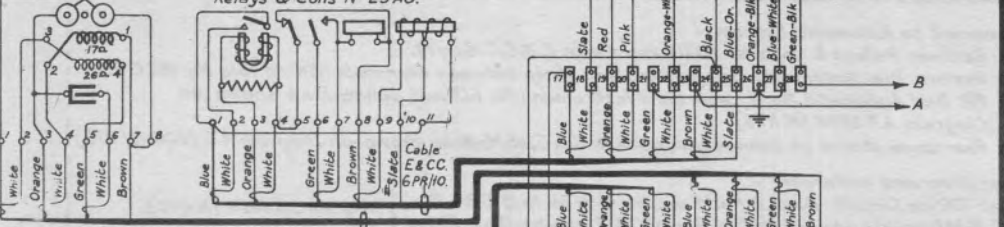

Telephone No 182 C.B.


Trans. No. 1.

Cable E & CC. 4 PR/10

Card Inst. No 222. (Waterproof)


Recvr. Bell No. 1A.

2 Cords Inst. No 116.



Card Inst. No 608. (Waterproof)

Strip Flex. Cord Conn. 6 Terminal. (When required.)




Cable E & CC 4 PR/10

Calling

Refund

Coin Chute

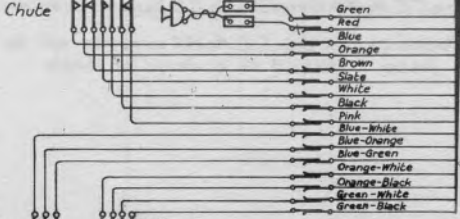

Dual No. C.B. 1423 deleted. Supersession note added.
 Ref. Box CC. No. 14A added.
 Amendment

Y

NOTES :-

1. Remove strap and connect Extension Bell between terminals 7 & 8 on Bell Set No. 24, when required.
2. To convert to Automatic System :-
 - (a) Recover Relays & Coils No. 29A0 and Cable E. & C.C. 6pr/10.
 - (b) Remove Dial Automatic Dummy No. 2 and strap between terminals 1 & 4 on Tele. No. 182 C.B.
 - (c) Fit Dial Automatic No. 11... and Cord Instrument No. 613 and connect as shown on Diagram A.T. 2204. (N. 1176.)
 - (d) Rearrange straps on connection plate in Box Cash No. 10. as shown on Diagram A.T. 2204. (N. 1176.)
3. Other Diagrams referring :-

Call Office Circuit. Box, C.C. No. 14 complete with Tele. No. 131 C.B. & Box, } C.C. No. 14A complete with Tele. No. 131 C.B. or 182 C.B. Explanatory Diagram for C.B. Sys } Telephone No. 182 C.B. Diagram C.B. 1426. (N. 282, Panel 1.) Relays & Coils No. 29A.0. " C.B. 1428. (N. 1187.) Bell Set No. 24. " C.B. 1425. (N. 524.) Box Coin Collecting No. 14. Mechanism. Diagram E.C. 1415. (N. 1185.) Schedule of Tests to prove the correct operation of Box, Coin Collecting No. 14, complete and Box, C.C. No. 14A complete, on C.B. System. Diagram N. 1173.	
--	--
4. A "Backboard for Box, C.C. No. 14A complete" will be required with Box, C.C. No. 14A complete when the latter is fitted to a desk or table.