


MARKING, SHOWN TYPICALLY, TO CONSIST OF -  
G.P.O., A.D.G., MANUFACTURERS NAME OR  
CODE AND YEAR OF MANUFACTURE

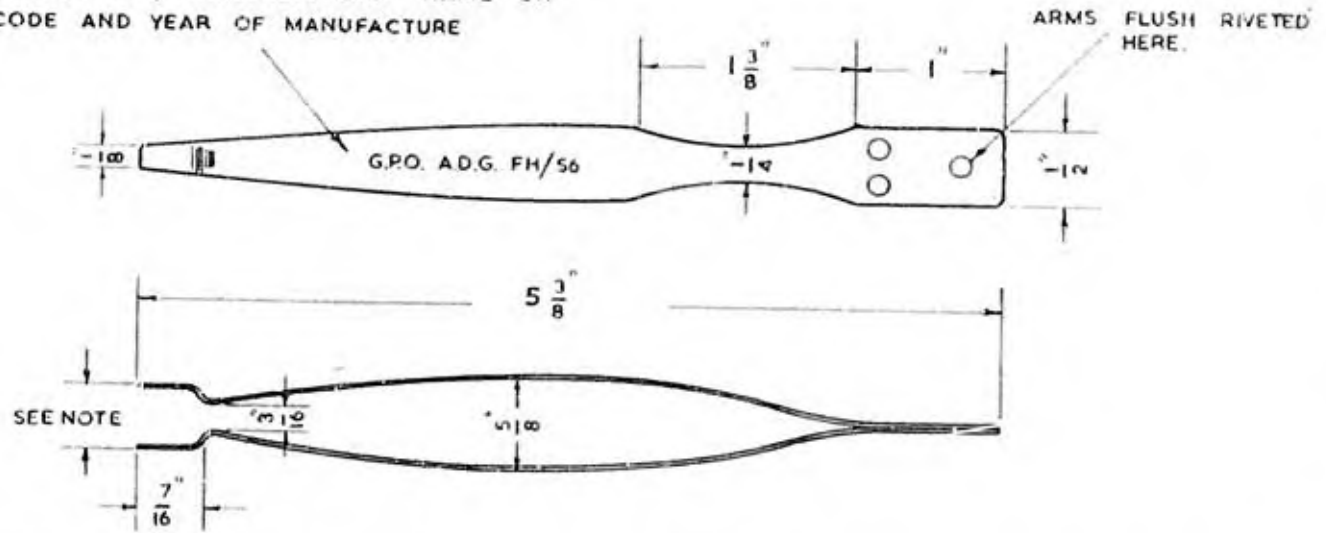

NOTE:- DISTANCE ACROSS OUTSIDE  
FACES OF TIPS TO BE  
200 ± 0.10 WHEN CLOSED

MATERIAL: SPRING STEEL 19 SWG (O40) BS W49 EN 42 J.  
FINISH: { HARDENED BRINELL, 450-500.  
          { BLUED.

POST OFFICE ENGINEERING DEPT	
CN BRANCH	
DISTRIBUTION	
HORS	
REFERENCES	
ASSEMBLY	DRG
FILE	SPEC
SCALE	1/16" = 1" INDICATED
LEGAL DIMENSIONS NOT TOLERANCED SUBJECT TO -	
AWD IN 1/3/1 SECTION	WH. HH. CHS. 12-12-58
AMENDMENT	
WHEN 0.3 ± 0.01 WAS 0.3	A
NOTE ADDED DIMEN BETWEEN INSIDE OF TIPS WAS 0.3 ± 0.01	B
FOR SUPERSED	
ADJUSTER, DIAL GOVERNOR.	
DRG CN 2332	