




CONDUCTOR BARED

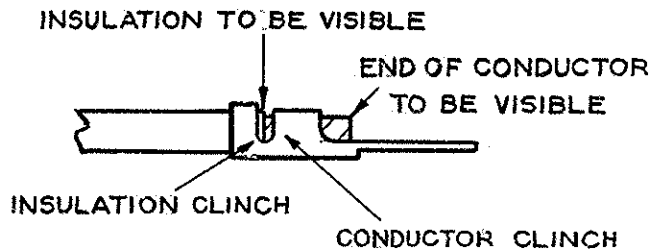

TAG:
DOUBLE - CLINCHED



WHERE SPECIFIED SEE SCHEDULE,
SLEEVE TO BE PVC (TRANSPARENT)
WALL THICKNESS 0.40mm MIN

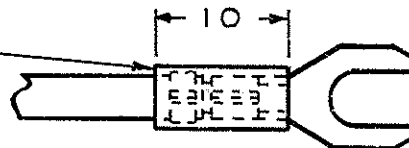

DETAIL	B A SIZE	TYPE	TAG NO.	SLEEVE REQUIREMENTS
1	4,5 & 6 BA	SPADE	1/STA/188	NO
2	4,5 & 6 BA		1/STA/188	YES
3	8 BA		2/STA/187	NO
4	8 BA		2/STA/187	YES
5	5 & 6 BA		1/DTA/220	NO
6	5 & 6 BA		1/DTA/220	YES
7	6 BA	RING	1/DTA/225	NO
8	6 BA		1/DTA/225	YES

NOTE: 1. FOR PULL OF REQUIREMENTS SEE DRG SD77



DIMENSIONS IN MILLIMETRES
DO NOT SCALE

		REDRAWN. DETS 7 & 8 ADDED UNITS WERE IMPERIAL <i>SMG/KAC JS</i> 14-5-71 SEE SUPERSEDED ISSUE FOR PREVIOUS AMENDMENTS	D	REFERENCES FILE S613/6 SEE SCHEDULE SPEC D1000 DRG SD77
A3 A4	DRN M.E.T CKD D.J.B	MATERIAL	FINISH	
	CERTIFICATION	STANDARD END FOR INSTRUMENT CORDS		
	W.S. ATHERTON			
	DATE 15.9.60			
THQ 4653	POST OFFICE TELECOMMUNICATIONS HEADQUARTERS TD11.1.4 SECTION		SD102	